Smooth®

color technik
Antriebstechnik GmbH

25PM403B-D1

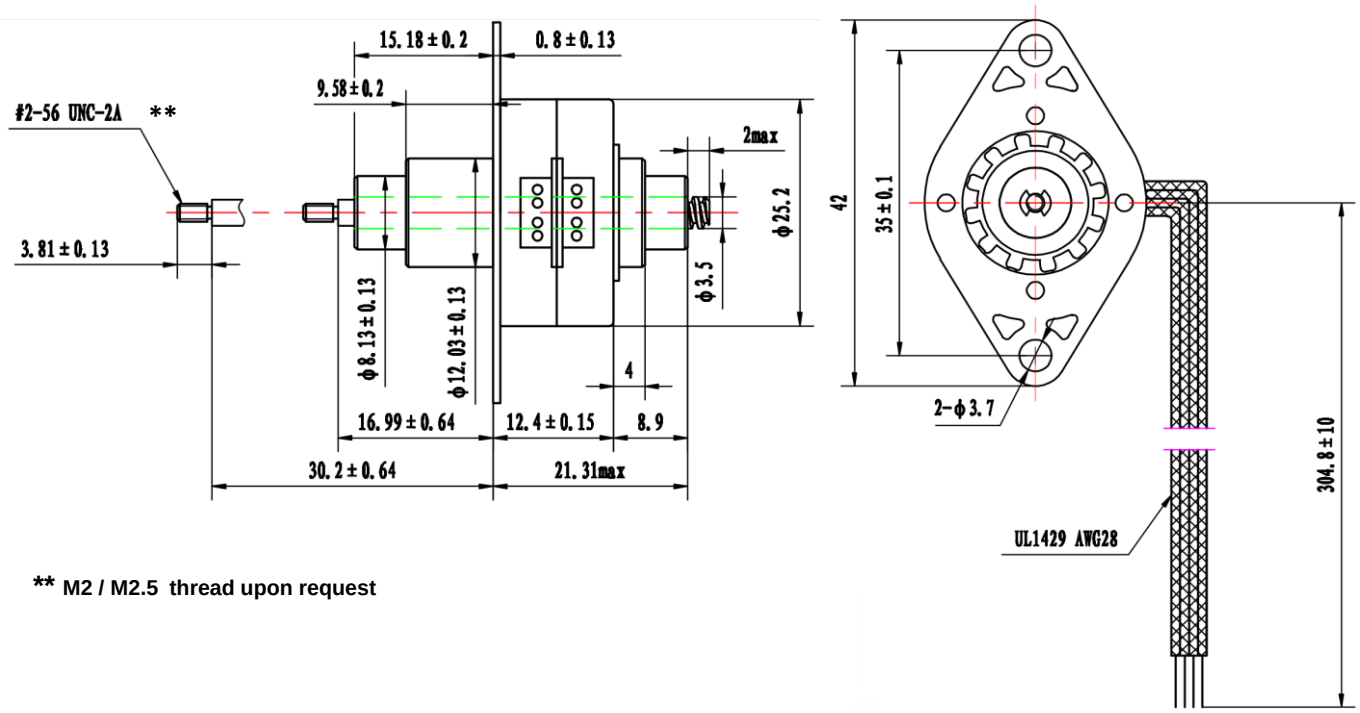

** M2 / M2.5 thread upon request

General specification		Electrical specification		Wiring diagramm
Step angle	7,5°	Rated voltage	5V	
Number of phase	2	Rated current	0.34A	
Insolation resistance	100MΩmin. (400V DC)	Resistance per phase	14.6 Ω ± 10%	
Insolation class	Class B	Inductance per phase	10 mH ± 20%	
		Push torque 50PPS	28.9 N	
Mass	35g	Travel per step	0.0254 mm	



EXTEND ↓

B	D	A	C
RED	GREY	YELLOW	BLACK
+	-	+	-
+	-	-	+
-	+	-	+
-	+	+	-
+	-	+	-

↑ RETRACT

color technik
Antriebstechnik GmbH
Starkenburgstr. 6 * 64546 Mörfelden
Tel.:06105 24044 * Fax:06105 25593
info@color-technik.net
www.color-technik.net

FEIHONG PRECISION MOTOR CO.,LTD

25PM403B-D1