Smooth

color technik
Antriebstechnik GmbH

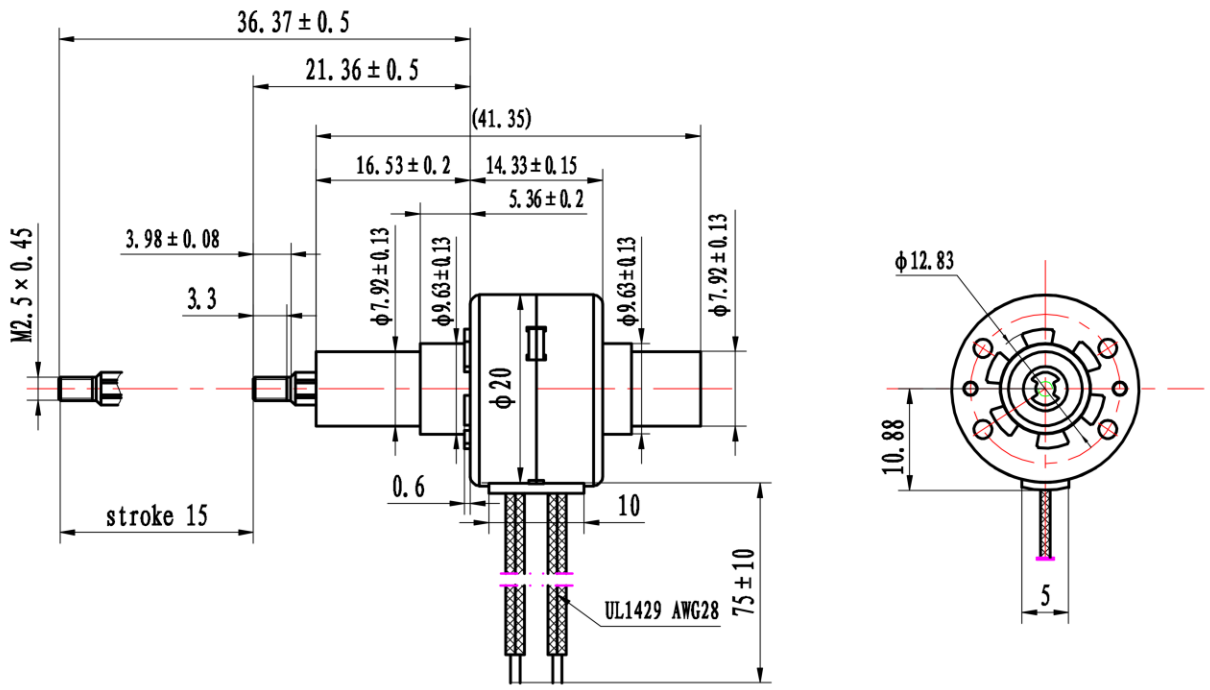

20PM004-D15B

Remark: Lead Screw Teflon Coating

General specification		Electrical specification		Wiring diagram
Step angle	15°	Rated voltage	5V	A yellow, C black, B red, D gray
Number of phase	2	Rated current	0.25A	
Insulation resistane	20MΩmin. (500V DC)	Resistance per phase	20Ω±10%	
Insulation class	Class B	Inductance per phase	7.2mH±20%	
Rotor inertia	38g.cm^2	Push torque	20.5N (at100pps)	
Mass	36g	Step travel	0.0508mm	

EXTEND ↓

B	D	A	C
RED	GRAY	YELLOW	BLACK
+	−	+	−
+	−	−	+
−	+	−	+
−	+	+	−
+	−	+	−

↑ RETRACT

标记	处数	更改文件号	签字	日期

设计		标准化	
		批准	
审核			
工艺		日期	

图样标记 | 重量 | 比例

宁波飞宏精密电机有限公司
NINGBO FEIHONG PRECISION MOTOR CO.,LTD

20PM004-D15B型步进电动机
规格书

FH3.162.

color technik
Antriebstechnik GmbH
Starkenburgstr. 6 * 64546 Mörfelden
Tel.:06105 24044 * Fax:06105 25593
info@color-technik.net
www.color-technik.net