Smooth®

color technik
Antriebstechnik GmbH

14HA801-10B

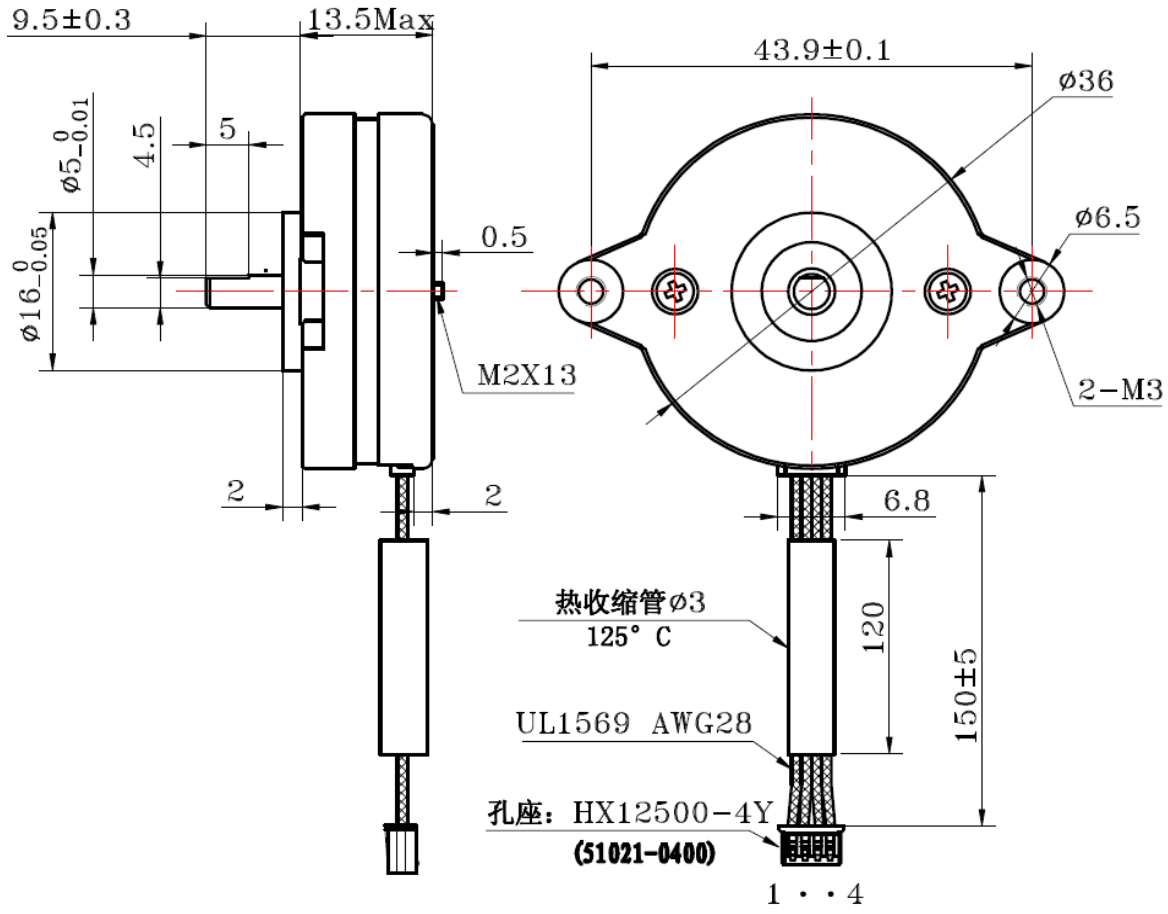

General specification		Electrical specification	
Step angle	0.9° ± 5%	Rated voltage	3.5 V
Number of phase	2	Rated current	0,2A
Insolation resistance	100MΩmin. (500V DC)	Resistance per phase	17 Ω ± 10%
Insolation class	Class B	Inductance per phase	7.1 mH ± 20%
Rotor inertia	7.2 g.cm²	Holding torque	22mNm
Mass	50g	Detent torque	1.8mNm

Wiring diagramm



A = RED
B = GREY
C = YELLOW
D = GREEN

14HA801-10S

Conditions:Bi-polar Constant Current Driver
Mode:Full Step

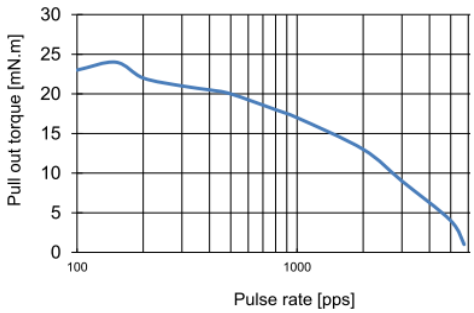

FEIHONG PRECISION MOTOR CO.,LTD

14HA801-10B

FH3.162.

Date 04.10.2017

color technik
Antriebstechnik GmbH
Starkenburgstr. 6 * 64546 Mörfelden
Tel.:06105 24044 * Fax:06105 25593
info@color-technik.net
www.color-technik.net