



BEARING POCKET MUST RESIST 7 KG PULL OUT FORCE
AND ERSSIST 2.5 KG · CM OF TORQUE, BOTH ENDS

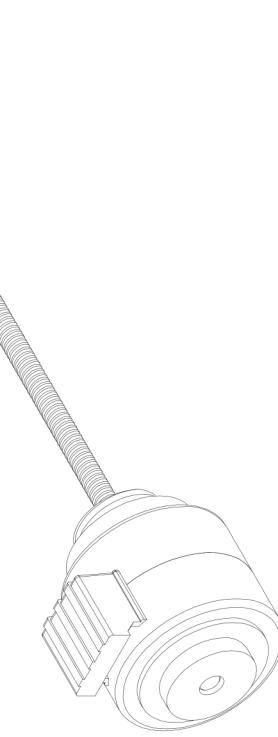

Nur für Projekte
bitte hier klicken

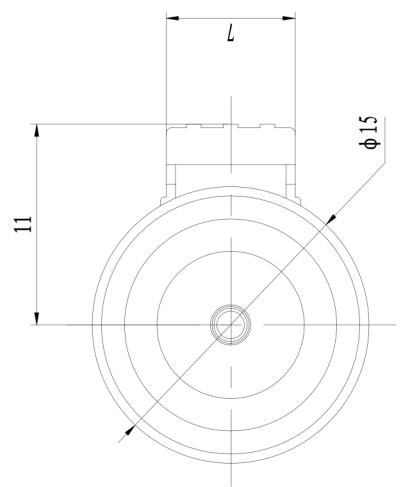

CW	B	D	A	C
	RED	BLACK	YELLOW	GREY
	+	-	+	-
	+	-	-	+
	-	+	-	+
	-	+	+	-
	+	-	+	-

General & Electrical specification	Wiring diagram			
	A	B	C	D
Step angle	18°			
Number of phase	2			
Insulation resistance	100MΩmin. (400V DC)			
Insulation class	Class B			
Mass	28g			
Rated voltage	5 V			
Rated current	0.16A			
Resistance per phase	31Ω ± 10%			
Inductance per phase	8.7mH ± 20%			
Force(100pps)	---N			
Step travel	0.05mm			

SMOOTH MOTOR ®
FEIHONG PRECISION MOTOR CO., LTD

15PM112-65N

Linear Actuator

FH3.162.

**ANGEBOT
ANFORDERN**
Bitte hier klicken

Total 1	Sheet 1 of 1		
	Marks	Weight	Ratio

Tag Num.	Changed	Signature	Date
Design	David Z	Standard	Approval